

Fire Extinguisher PA25-180

Fire extinguisher pressurized with nitrogen



Prod. no.: AF 390i

Extinguishing agent:ABC Powder
Nominal charge:25 kg
Jet length:7 mt at +20°C
Discharge time:25 sec. at +20°C

1: Vessel

Diameter:300 mm
Min. thickness:2.5 mm
Material:Steel DD12 (UNI EN 10111)
Working pressure:15 bar at +20°C
Test pressure:30 bar at +20°C
Burst pressure:55 bar at +20°C

2: Filling cap Ø2" complete with:

Spring safety valve set at 22 bar +/- 2

Cap body:Brass

3: Discharge hose

Length:3.5 metres
Diameter:13 x 23 mm
Burst pressure:60 bar
Material:Wire braided rubber

4: Discharging apparatus

Horn:Polypropylene

5: Manometer Ø 35

Material:Brass

6: Wheels

Diameter:200 mm
Material:Hard rubber/PVC


Overall dimensions

Height:850 mm
Depth:640 mm
Width:410 mm
Weight:45 kg

Painting cycle

Deep sandblasting Epoxy powder painting:50 µm
Colour, cylinder:Red RAL 3000

Filled with 25 kg ABC multipurpose dry chemical powder

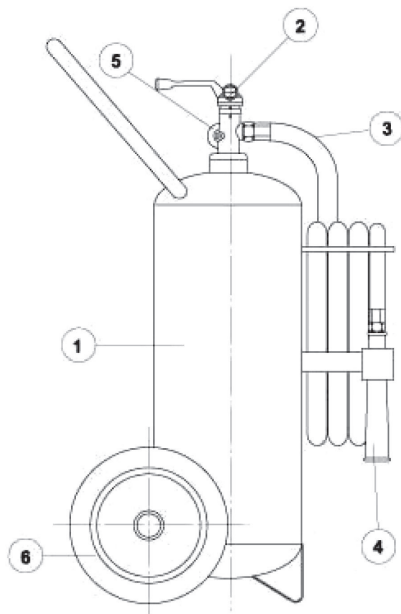

Lotek - Fire Extinguisher PA25-180 - 120112

